



Please check  
your best model



Recommended  
substitutes webpage

# Modernize

Easy migration to the latest HMI with high-resolution on wide-display



Basic HMI ST6000 Series powered by GP-Pro EX


proface.com

**Pro-face**<sup>TM</sup>  
by Schneider Electric

# Achieve a high level of visualization with the new Basic HMI

## Refine

Achieve the previously unimaginable and bring displays to life with **high resolution and 16 million colors**.

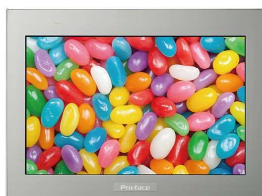

## Simple & Easy

Use the same application (GP-Pro EX) and leverage existing assets.




GP4000  
W model  
(4:3, Wide)



ST6000  
(Wide)

## Connected & Secure

**User-friendly protocols** allowing you to connect your devices with ease via multiple interfaces and connect OT to IT.

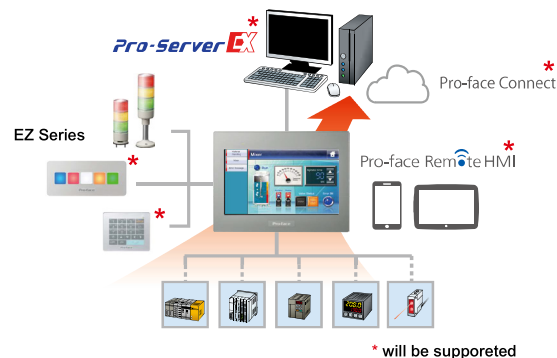

## Specification comparison

Upgrade

|               |                     | ST6000 with GP-Pro EX                                                                                                                                                                                                                                     |                         |                         |                    |                           |
|---------------|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------|--------------------|---------------------------|
| Model No      |                     | PFXST6700WADE                                                                                                                                                                                                                                             | PFXST6600WADE           | PFXST6500WADE           | PFXST6400WADE      | PFXST6200WADE             |
| Display       | Size/<br>Resolution | 15.6"W<br>(1,366 x 768)                                                                                                                                                                                                                                   | 12.1"W<br>(1,280 x 800) | 10.1"W<br>(1,024 x 600) | 7"W<br>(800 x 480) | 4.3"W<br>(480 x 272)      |
|               | Color               | 16M colors                                                                                                                                                                                                                                                |                         |                         |                    |                           |
|               | Touch               | Analog                                                                                                                                                                                                                                                    |                         |                         |                    |                           |
| Interface     | Serial              | RS-232C x1, RS-422 / 485 x1                                                                                                                                                                                                                               |                         |                         |                    | RS-232C / 422 / 485 x1 *1 |
|               | Ethernet            | 10BASE-T / 100BASE-TX x2                                                                                                                                                                                                                                  |                         |                         |                    | 10BASE-T / 100BASE-TX x1  |
|               | USB                 | Type-A x1, Micro-B x1                                                                                                                                                                                                                                     |                         |                         |                    |                           |
|               | SD card             | -                                                                                                                                                                                                                                                         |                         |                         |                    |                           |
| Front frame   |                     | Aluminum                                                                                                                                                                                                                                                  |                         |                         |                    |                           |
| Certification |                     | IP65F, Type 1, Type 4X (indoor use only), Type 13 (on the front panel when properly installed in an enclosure), CE, UL and cUL, RMC, KC, EAC, RoHS, WEEE                                                                                                  |                         |                         |                    |                           |
| Installation  |                     | Tooling free fastener                                                                                                                                                                                                                                     |                         |                         |                    | Fastener                  |
| Memory        |                     | Application memory: Media : FLASH EPROM / Screen area: 64MB / User font area 8 MB / Logic program area: 132KB<br>Backup memory: Screen Area: SRAM 320KB, Variable Area: SRAM 64KB<br>Battery: Replaceable battery / Primary battery for clock data backup |                         |                         |                    |                           |
| Protocol      |                     | Connect to up to 2 drivers at the same time                                                                                                                                                                                                               |                         |                         |                    |                           |

\*1 COM port supports RS-232C only. RS-422/485 will be available in 2021.



民僑企業有限公司

Pro-face

BANNER

營業項目

工業及人機界面  
圖控系統軟體

自動控制器材  
可程式控制器

Tel: (02) 2657-1121  
新台北市土城區中央路四段四號四樓之一  
<http://www.minchayau.com.tw>

Pro-face

by Schneider Electric

更多詳細資訊，請參閱台灣普羅菲司網站：

<http://www.proface.com.tw>

台灣普羅菲司  
Pro-face Taiwan

台北公司  
11492台北市內湖區基湖路39號2樓  
Tel: (02) 2657-1121  
Fax: (02) 2657-1021  
[www.proface.com.tw](http://www.proface.com.tw)  
[proface@proface.com.tw](mailto:proface@proface.com.tw)

全省技術客服專線

(04)2329-1143/support@proface.com.tw

台中辦事處  
40861台中市南屯區公益路二段  
51號公益大樓9樓B1  
Tel: (04) 2329-1121  
Fax: (04) 2328-1121

台南辦事處  
Tel: (06) 599-5737